

Document No	CEBA1868130-3.2V10AH	Version	A/00	Page	1 / 8
--------------------	----------------------	----------------	------	-------------	-------

Specification

For

LiFePO₄ Rechargeable Cell

Cell Type : CEBA1868130-10AH

	CEBA1868130-10AH	Revised date	2015-8-12
Version	A/00	Pages	8
Approved	Checked	Designed	
Huyuan Li	Hu Yan	Bing Wang	

Document No	CEBA1868130-3.2V10AH	Version	A/00	Page	2 / 8
--------------------	----------------------	----------------	------	-------------	--------------

Contents

- 1 preface**
- 2 Definition**
- 2.1 Rated capacity**
- 2.2 Standard charge method**
- 2.3 Standard discharge method**
- 3 Cell dimensions**
- 4 Cell characteristics**
- 5 Technical requirements**
- 5.1 Cell usage conditions**
- 5.2 Cell testing conditions**
- 5.3 Requirement of the testing equipment**
- 5.4 Electrochemical characteristics**
- 5.5 Environmental characteristics and safety characteristics**
- 6 Shipment**
- 7 Warranty**
- 8 Storage and Shipment Requirement**
- 9 Warning and cautions in handling the lithium-ion cell**

Document No	CEBA1868130-3.2V10AH	Version	A/00	Page	3 / 8
--------------------	----------------------	----------------	------	-------------	--------------

1 preface

This specification describes the type and dimension, performance, technical characteristics, warning and caution of the LiFePO₄ rechargeable cell. The specification only applies to 3.2V CEBA1868130-10AH cell supplied by EnnoPro Group Limited.

2 Definition

2.1 Rated capacity:

Rated capacity Cap=10Ah. Under $25 \pm 3^{\circ}\text{C}$, the capacity obtained when a cell is discharged at 5-hours rate to voltage 2.5 V, which is signed Cap, the unit is Ah.

2.2 Standard charge method


Under $25 \pm 3^{\circ}\text{C}$, it can be charged to 3.65V with constant current of 0.5C, and then, charged continuously with constant voltage of 3.65V until the charged current is 0.01C.

2.3 Standard discharge method:

Under $25 \pm 3^{\circ}\text{C}$, it can be discharged to 2.5 V with constant current of 0.2C .

3 Cell dimension

Cell physical dimension (unit: mm).

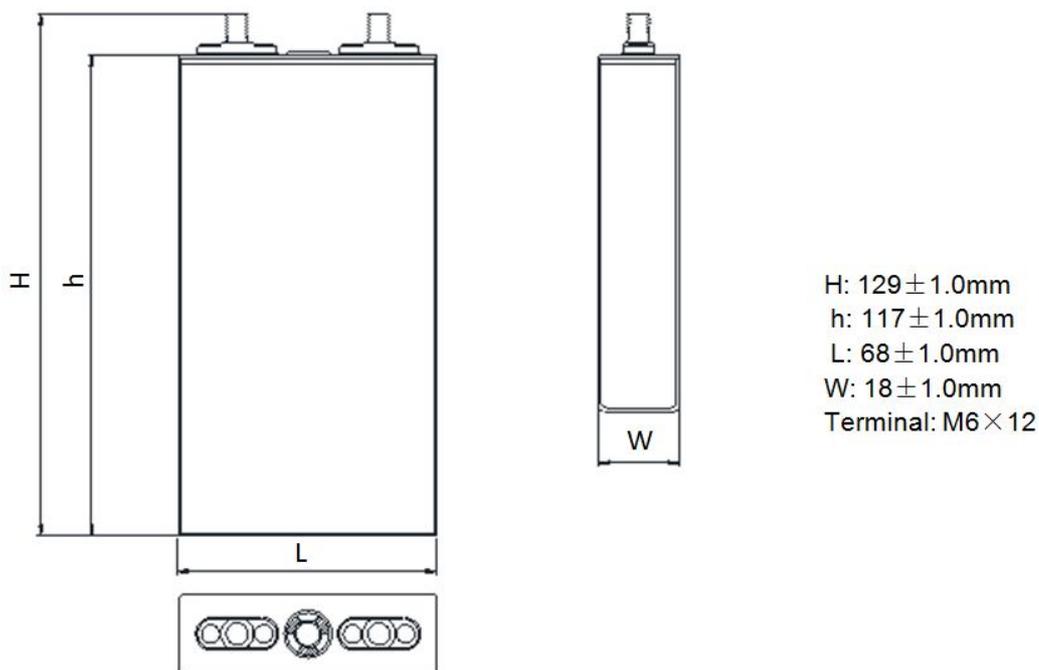





Document No	CEBA1868130-3.2V10AH	Version	A/00	Page	4 / 8
--------------------	----------------------	----------------	------	-------------	-------

4 Cell characteristics

Fresh cell tested at $25\pm 3^{\circ}\text{C}$, standard charge and discharge unless otherwise specified

ITEM	SPECIFICATION
Nominal capacity	10Ah@0.2C
Minimum capacity	10Ah@0.2C
Nominal voltage	3.2 V
Charge voltage (End current)	3.65 V (0.05C)
Energy density	107Wh/Kg
Discharge ending voltage	2.5 V
Max charge current	1C $45^{\circ}\text{C} > T \geq 0^{\circ}\text{C}$
Max discharge current	3C $60^{\circ}\text{C} > T \geq -20^{\circ}\text{C}$
Storage temperature and time	1month (1 个月): $-20\sim 60^{\circ}\text{C}$ 3month (3 个月): $-20\sim 45^{\circ}\text{C}$ 12month (12 个月): $-20\sim 25^{\circ}\text{C}$
Internal resistance	$\leq 15\text{ m}\Omega$ (AC Impedance, at 1000 Hz)
Cell dimension	Height : 130.0 mm Max Width : 69.0mm Max Thickness: 19.0mm Max
Weight	Approx. 310g

Document No	CEBA1868130-3.2V10AH	Version	A/00	Page	5 / 8
-------------	----------------------	---------	------	------	-------

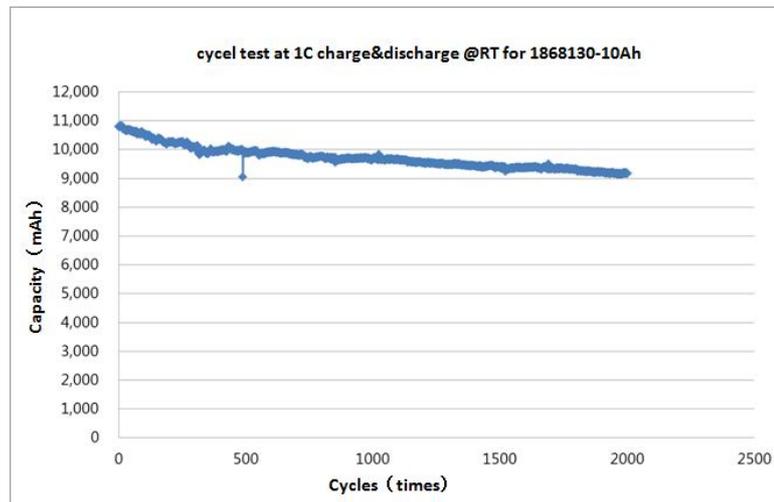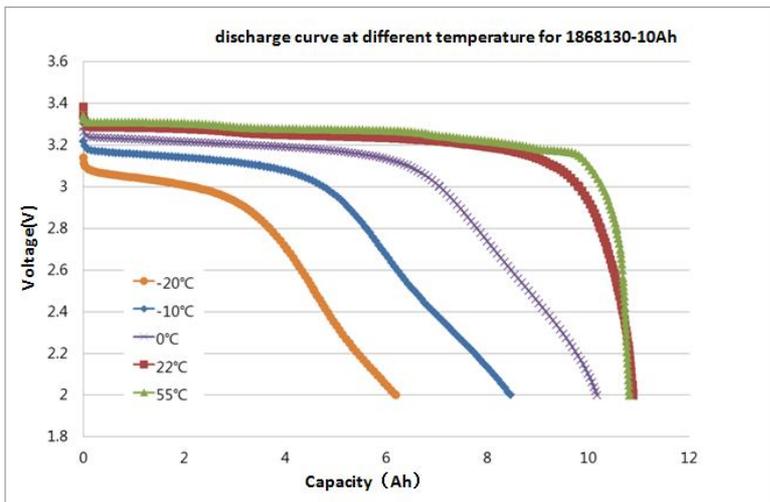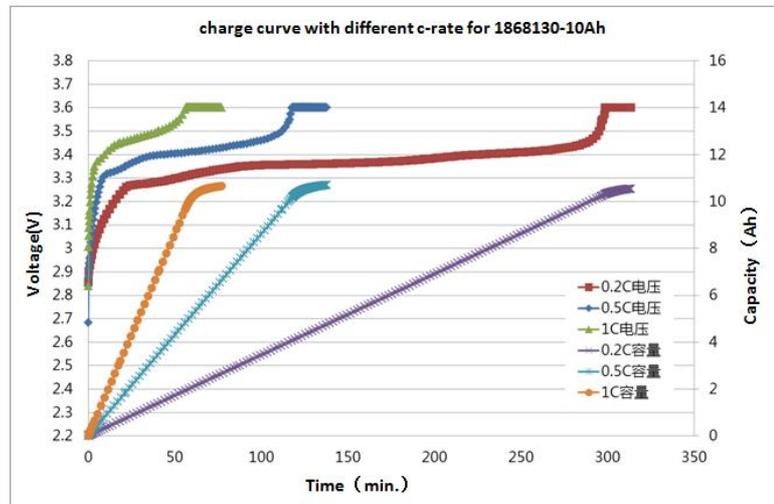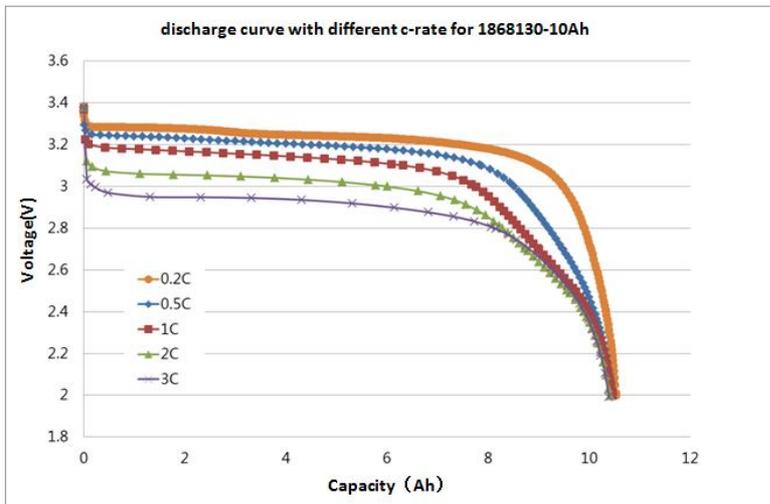

5 Technical requirements

5.1 Cell usage conditions

Temperature of charge: 0~45°C

Temperature of discharge 放电温: -20~60°C

5.2 Cell testing conditions

Unless otherwise specified, all tests stated according to following:

Temperature: 25±3°C

5.3 Requirement of the testing equipment:

Voltage meter: The voltage tester internal resistance is $\geq 10 \text{ K}\Omega$

Temperature meter: The precision is $\leq 0.5^\circ\text{C}$

Document No	CEBA1868130-3.2V10AH	Version	A/00	Page	6 / 8
--------------------	----------------------	----------------	------	-------------	--------------

5.4 Electrochemical Characteristics

Fresh cells, tested at $25 \pm 3^\circ\text{C}$, standard charge and discharge unless otherwise specified.

NO.	ITEM	CRITERION
	Discharge rate capability	Test condition: Temperature : $25 \pm 3^\circ\text{C}$ Charge: CC/CV at 0.5C to 3.65V, cut off current: 0.05C Discharge: CC at different rate; End-of-discharge Voltage: 2.5V discharge capacity at 0.5C/discharge capacity at 0.2C \geq 95% discharge capacity at 1.0C/discharge capacity at 0.2C \geq 90% discharge capacity at 2.0C/discharge capacity at 0.2C \geq 80%
	Cycle life	Test condition: Temperature : $25 \pm 3^\circ\text{C}$ Charge: CC/CV at 0.5C to 3.65V, cut off current: 0.05C, Discharge: CC 0.5C; End-of-discharge Voltage: 2.5V, till 2000th Cycle, Discharge capacity \geq 80% initial capacity
	High-Low temperature discharge performance	Test condition: Charge: CC/CV at 0.5C to 3.65V, cut off current: 0.05C Discharge: CC at 0.5C; End-of-discharge Voltage: 2.5V Discharge Capacity at -10°C /discharge Capacity at 25°C \geq 55% Discharge Capacity at 0°C /discharge Capacity at 25°C \geq 75% Discharge Capacity at 60°C /discharge Capacity at 25°C \geq 95%
	Storage performance	Test condition: Charge: CC/CV at 0.5C to 3.65V, cut off current: 0.01C; stored at 25°C for 30 days Discharge: CC at 0.5C; End-of-discharge Voltage: 2.5V, Residual capacity after 30 days storage/ initial capacity \geq 90% Recover capacity after 30 days storage/ initial capacity \geq 95%

5.5 Environmental characteristics and safety characteristics

Comply with ROHS standard

6 Shipment

The cell voltage should not be less than 3.2V when shipped or in accordance with customers' requirement. The remaining capacity before charging will depend on the storage time and conditions.

Document No	CEBA1868130-3.2V10AH	Version	A/00	Page	7 / 8
--------------------	----------------------	----------------	------	-------------	-------

7 Warranty

The Warranty period of cell is made according to business contract. However, even though the problem occurs within this period, Legend won't replace a new cell for free as long as the problem is not due to the failure of Legend manufacturing process or is due to customer's abuse or misuse.

Legend will not be responsible for trouble occurred by handling outside of the precautions in instructions.

Legend will not be responsible for trouble occurred by matching electric circuit, cell pack and charger.

Legend will be exempt from warrantee any defect cells during assembling after acceptance.

8 Storage and Shipment Requirement

Item		Requirement
Storage environment	Short period less than 1 month	-20°C ~ +60°C , 90%RH Max
	Long period more than 3 month	-10°C ~ + 45°C , 90%RH Max
	Recommend storage	-10°C ~ + 25°C , 85%RH Max
Long time storage : If the cell is stored for a long time, the cell's storage voltage should be 3.3-3.4V .Also, it is recommended to charge the cell every six months.		

9 Warning and cautions in handling the lithium-ion cell

Lithium-Ion rechargeable batteries subject to abusive conditions can cause damage to the cell and/or personal injury. Please read and observe the standard cell precautions below before using utilization.

Note 1. The customer is required to contact Legend in advance, if and when the customer needs other applications or operating conditions than those described in this document.

Note 2. Legend will take no responsibility for any accident when the cell is used under other conditions than those described in this Document.

Warning

Danger warning (it should be described in manual or instruction for users, indicated especially) to prevent the possibility of the battery from leaking, heating, explosion. Please observe the following precautions:

Don't immerse the battery in water and seawater. Please put it in cool and dry environment if no using.

Don't use and leave the cell near a heat source such as fire or heater.

Do not use or leave the cell under the blazing sun (or in heated car by sunshine).

Document No	CEBA1868130-3.2V10AH	Version	A/00	Page	8 / 8
--------------------	----------------------	----------------	------	-------------	--------------

Being charged, using the battery charger specifically for that purpose.

Don't reverse the positive and negative terminals

Do not disassemble or modify the cell.

Do not use the cell with conspicuous damage or deformation..

Don't connect the cell to an electrical outlet directly.

Don't discard the cell in fire or heater.

Do not short circuit, over-charge or over-discharge the cell.

Don't transport and store the cell together with metal objects such as necklaces, hairpins.

Do not use lithium ion battery and others different lithium battery model in mixture.

Keep the battery away from babies.

Don't strike, throw or trample the cell.

Prohibition of use of damaged cells.

Battery pack designing and packing Prohibition injury batteries.

The battery replacement shall be done only by either cells supplier or device supplier and never be done by the user.

Be aware discharged batteries may cause fire; tape the terminals to insulate them.

Do not use it in a location where is electrostatic and magnetic greatly, otherwise, the safety devices may be damaged, causing hidden trouble of safety.

Do not directly solder the battery and pierce the battery with a nail or other sharp object.

Do not recommend series and parallel connection (not cylinder battery), Otherwise, do that after grouping.

When disposing of secondary cells, keep cells of different electrochemical systems separate from each other.

Caution

Do not use or leave the battery at very high temperature conditions (for example, strong direct sunlight or a vehicle in extremely hot conditions). Otherwise, it can overheat or fire or its performance will be degenerate and its service life will be decreased.

If the cell leaks and the electrolyte get into the eyes, don't wipe eyes, instead, thoroughly rinse the eyes with clean running water for at least 15 minutes, and immediately seek medical attention. Otherwise, eyes injury can result.

If the cell gives off an odor, generates heat, becomes discolored or deformed, or in any way appear abnormal during usage, recharging or storage, immediately remove it from the device or cell charger and stop using it.

In case the battery terminals are dirt, clean the terminals with a dry cloth before use. Otherwise power failure or charge failure may occur due to the poor connection with the instrument.